


# X25 Quick Setup Card



- Quick Setup Procedure with AGA4700 Harness**
1. Use the mount to attach the RAM ball on a rail or a flat surface in the tractor cabin.
  2. Using the RAM arm, install the X25 console in the tractor cabin. Turn the handle clockwise to tighten the RAM mount onto the RAM ball.
  3. Secure the GPS receiver to the roof of the tractor. Try to position it as close to center as possible.
  4. Connect the harness to the X25 console.
  5. Route the harness GPS connectors through the rear window to the GPS receiver.
  6. Connect the power harness to the tractor battery.
  7. To use an external power switch, attach a wire between a switched power source and the power harness.

X25 Console

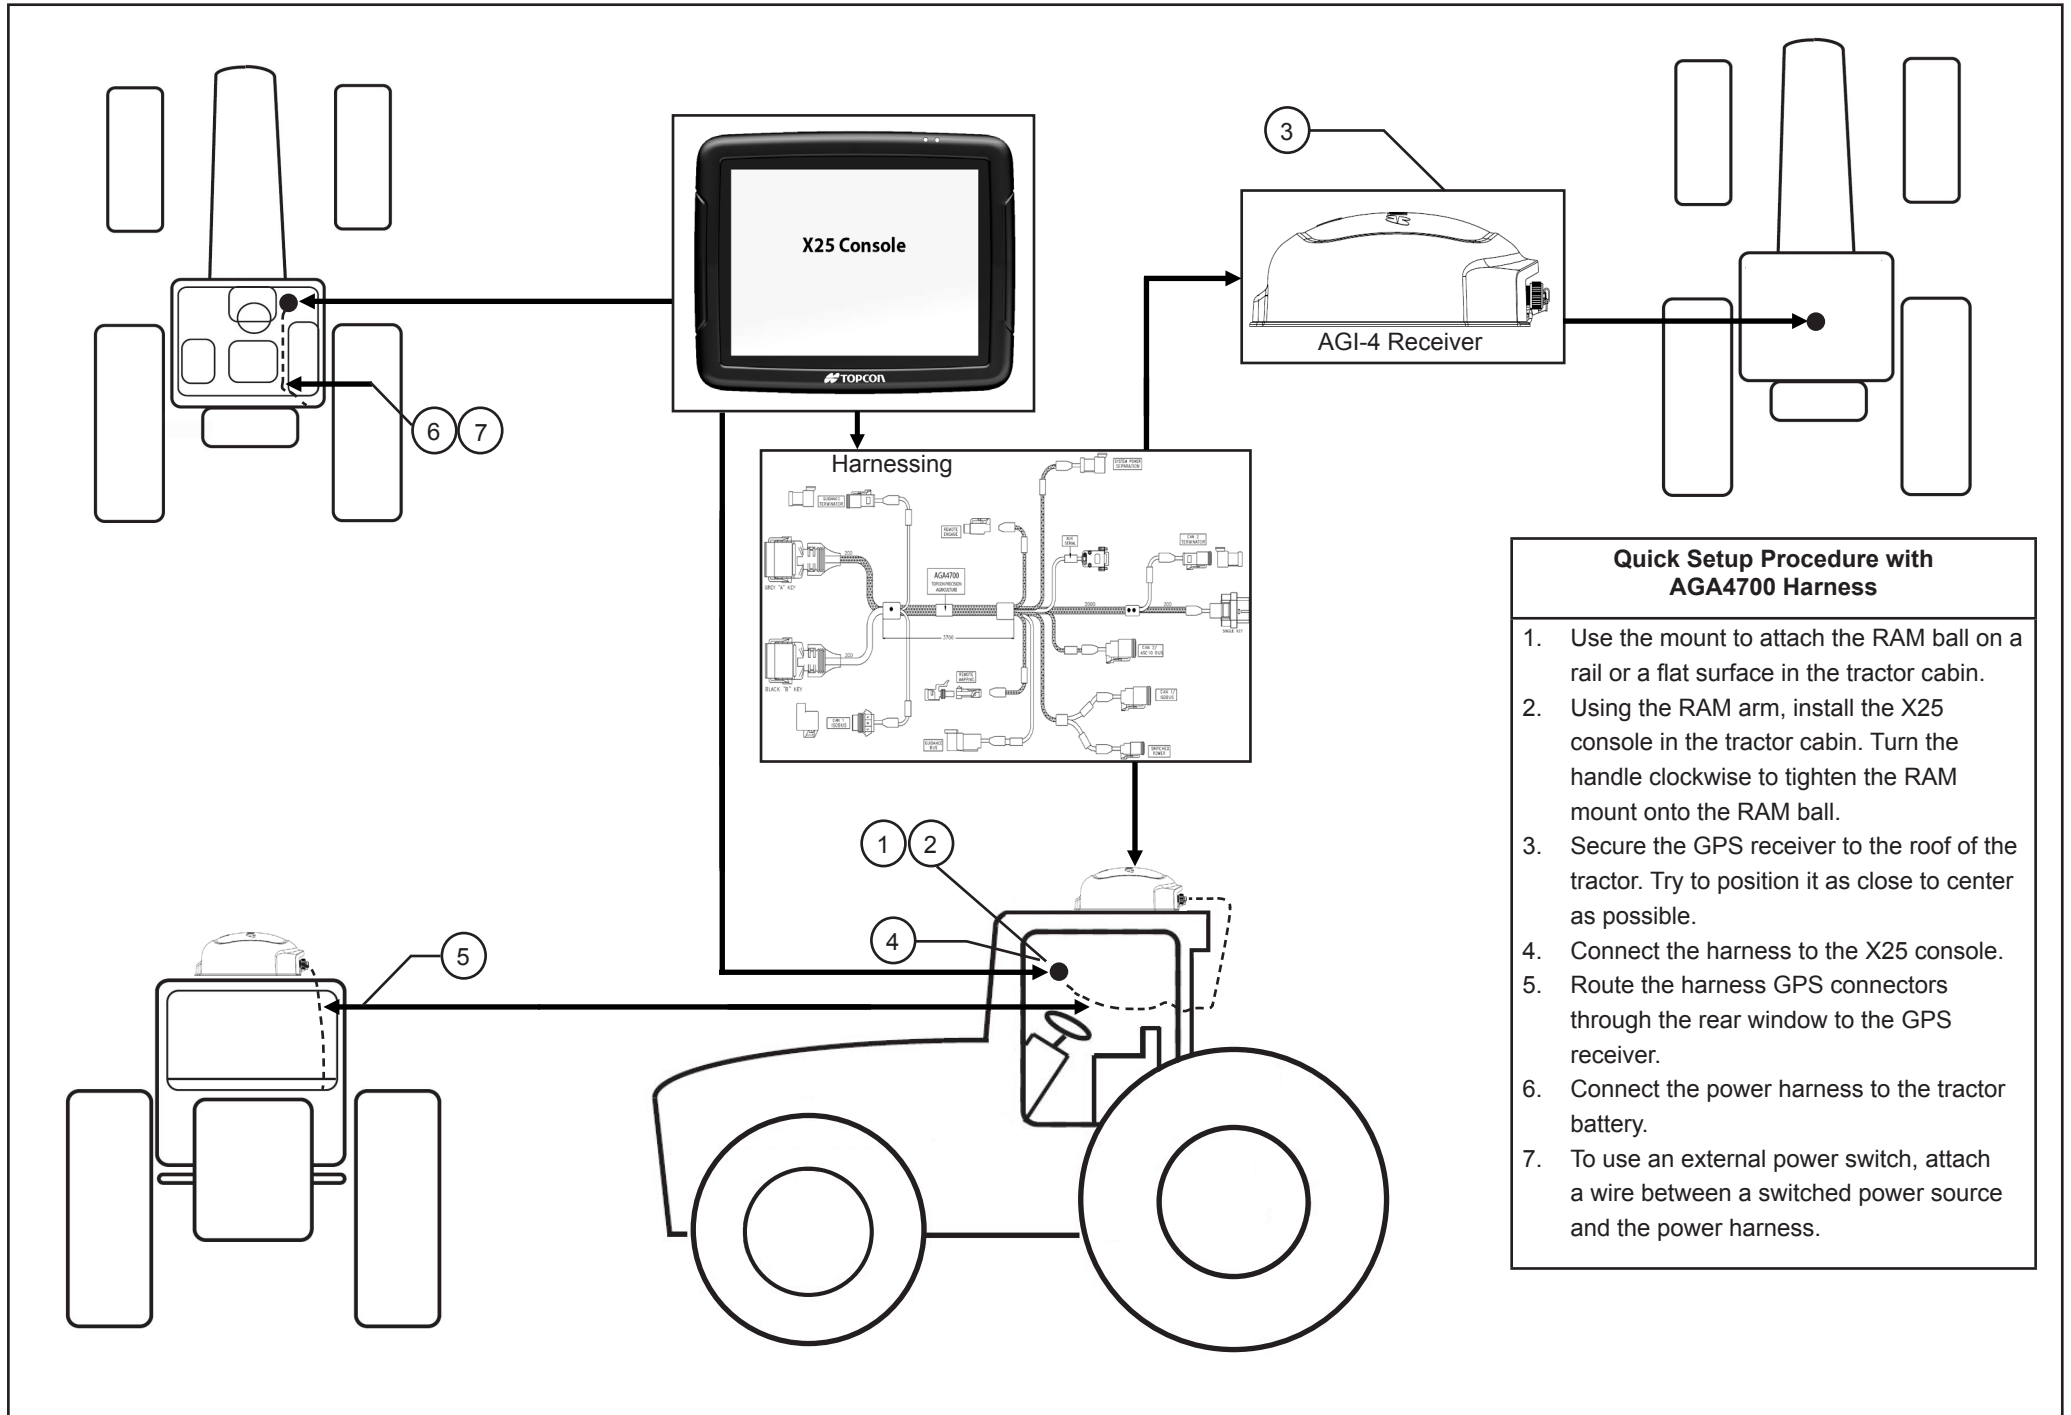

Power button

